loosers .leosol

Figure 1: CD frame format

1 1 1 1 1 1 1 1 1 1		-				1								Jue	S S	эше	250	Cuali	One CD frame (350 chaintel bits)	(2)									1			 -		
24 14 14 14 14 14 14 14 14 14 14 14 14 14			Ц				일	mali	Q S	ata				4		arily	\prod	Ц				ugu	ligiligiligi	n Da	20			<u> </u>	Pa	Zij.	П			
14 14 14 14 14 14 14 14 14 14 14 14 14 1	#			-	2		4	40	9	==					_					18		-					 			30	33		+	- 1
		4	- 1 1			7.	4													14	7							i	7.	7	포	24		1 1
Sychronization pattern (1000000000000000000000000000000000000	=°	_ _"	_ 	_ e			-" 		="	="	==	=~	=~	= e	_m	<u>-</u> ~		 	_ n	- 63	- ~	-7	_ m	6	. w	. L.S	 	. m	- -	- (1)	 -m	- es	- ო	
Auxiliary bits for merging and low frequency suppression Subcode data (for control and display)		S S	hron	iizali	ed uc	llen	(100	0000	0000	1000	0000	0001	6																					
Subcode data (for control and display)			xiltar	γpij	s for	пегд	ing a	nd lo	w fre	Juent	ins K	bres	sion																					
			Sul	pooc	e dat	a (fo	Con	rol a	g G	play)	_																							

9 19 -ch 2-O atidio outpul DAC and LP filler DAC and LP filter Channel demux correction M display error control & display decoding demodulation control functions 40 sync detection + timing regeneration clock bit detection inpul trom

Figure 2: Decoding process

PCT/EP01/02633

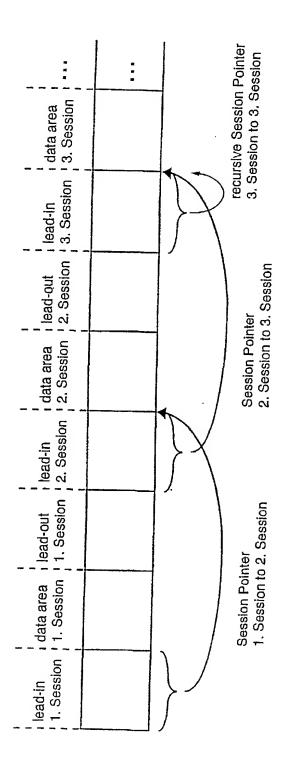


Fig. 3